

Ishtar-SB1000

Ishtar-SB1000 Single-lane swing barrier turnstile

Ishtar-SB1011 Single-lane swing barrier turnstile

(with a controller and a RFID reader)

Ishtar-SB1022 Single-lane swing barrier turnstile

(with a controller and a fingerprint & RFID reader)



The Ishtar-SB1000 Series of wide-passage single-lane swing barriers is an elegant and cost-effective entrance control system specially designed for large parcel delivery and people with physical disabilities.



The Ishtar-SB1000 Series offers a single-lane swing barrier designed for smooth and quiet operation and draws very little power. The width of the lane is 800mm. The default gate opening/closing time is 3 seconds. The sensitive infrared sensor installed at the bottom part of the gate could prevent accidental bangs by the moving barrier glass. Besides, during a power outage, users could simply push and open the gate then leave the area.

Standard Application

Armatura One Security Platform

Web-Based Versatile Security Platform

Armatura One is the ultimate “All-in-One” web-based security platform developed by Armatura. It contains multiple integrated modules: Personnel, Access Control, Time & Attendance, Elevator, Visitor, Parking Management, Video Management System, Office, Entrance Control, FaceKiosk, Defence, Data Monitor, Building Automation and Intrusion.

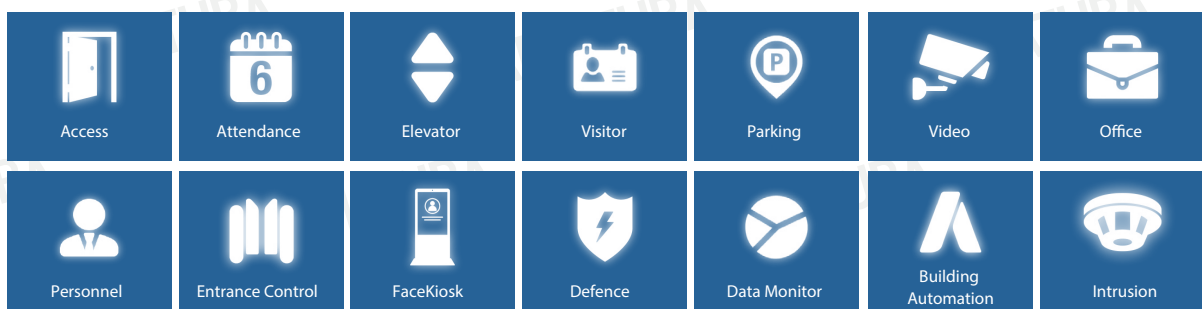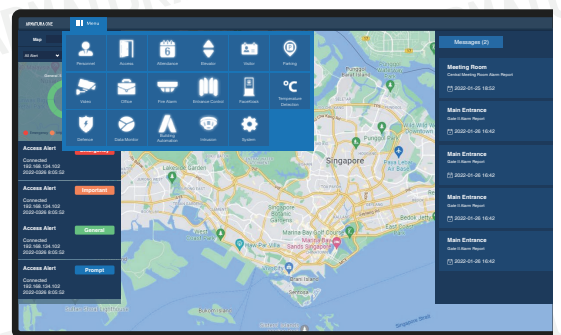

Features


Reliability

- A design for both disabled and non-disabled users
- MCBF of 5-million times
- Smart indicator modes representing the standby, successful verification and access denied status

Safety

- Anti-collision
- Barrier unlock automatically during a power outage
- Fast and straightforward card and fingerprint authentication

Dimension

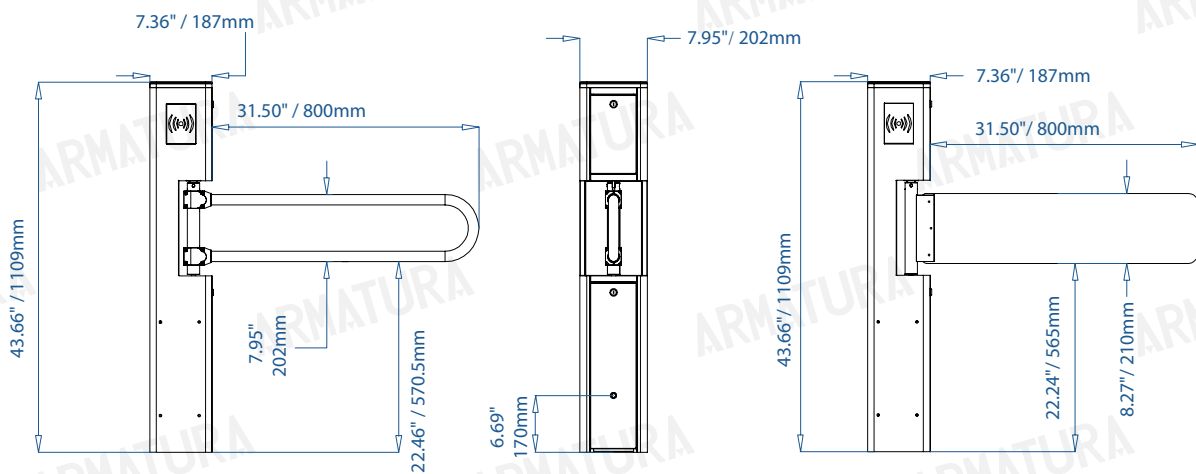

Specifications

Power Requirements

AC 110V / 220V, 50 / 60Hz

Lane Width

31.50" (optional $\leq 36.22"$)
800mm (optional ≤ 920 mm)

Infrared Sensor

1 Pair

LED Indicator

Support

Cabinet Material

Cold rolled sheet (optional: SUS304 stainless steel)

Lid Material

Acrylic

Barrier Material

Barrier Material: Acrylic
(Optional: Stainless Steel)

Barrier Movement

Swing

Emergency Mode

Support

Operating Temperature

5°F to 140°F
-15°C to 60°C

Operating Humidity

20% to 95% RH (non-condensing)

Operating Environment

Indoor / Outdoor (if sheltered)

Dimensions

7.36" W x 7.95" L x 43.66" H
(187 x 202 x 1109mm)

Dimensions With Packaging

11.02" W x 11.02" L x 45.67" H
(280 x 280 x 1160mm)

Net Weight

52.91lb / 24kg

Gross Weight

90.39lb
41kg


MCBF

5million

Warranty

1year

Configuration

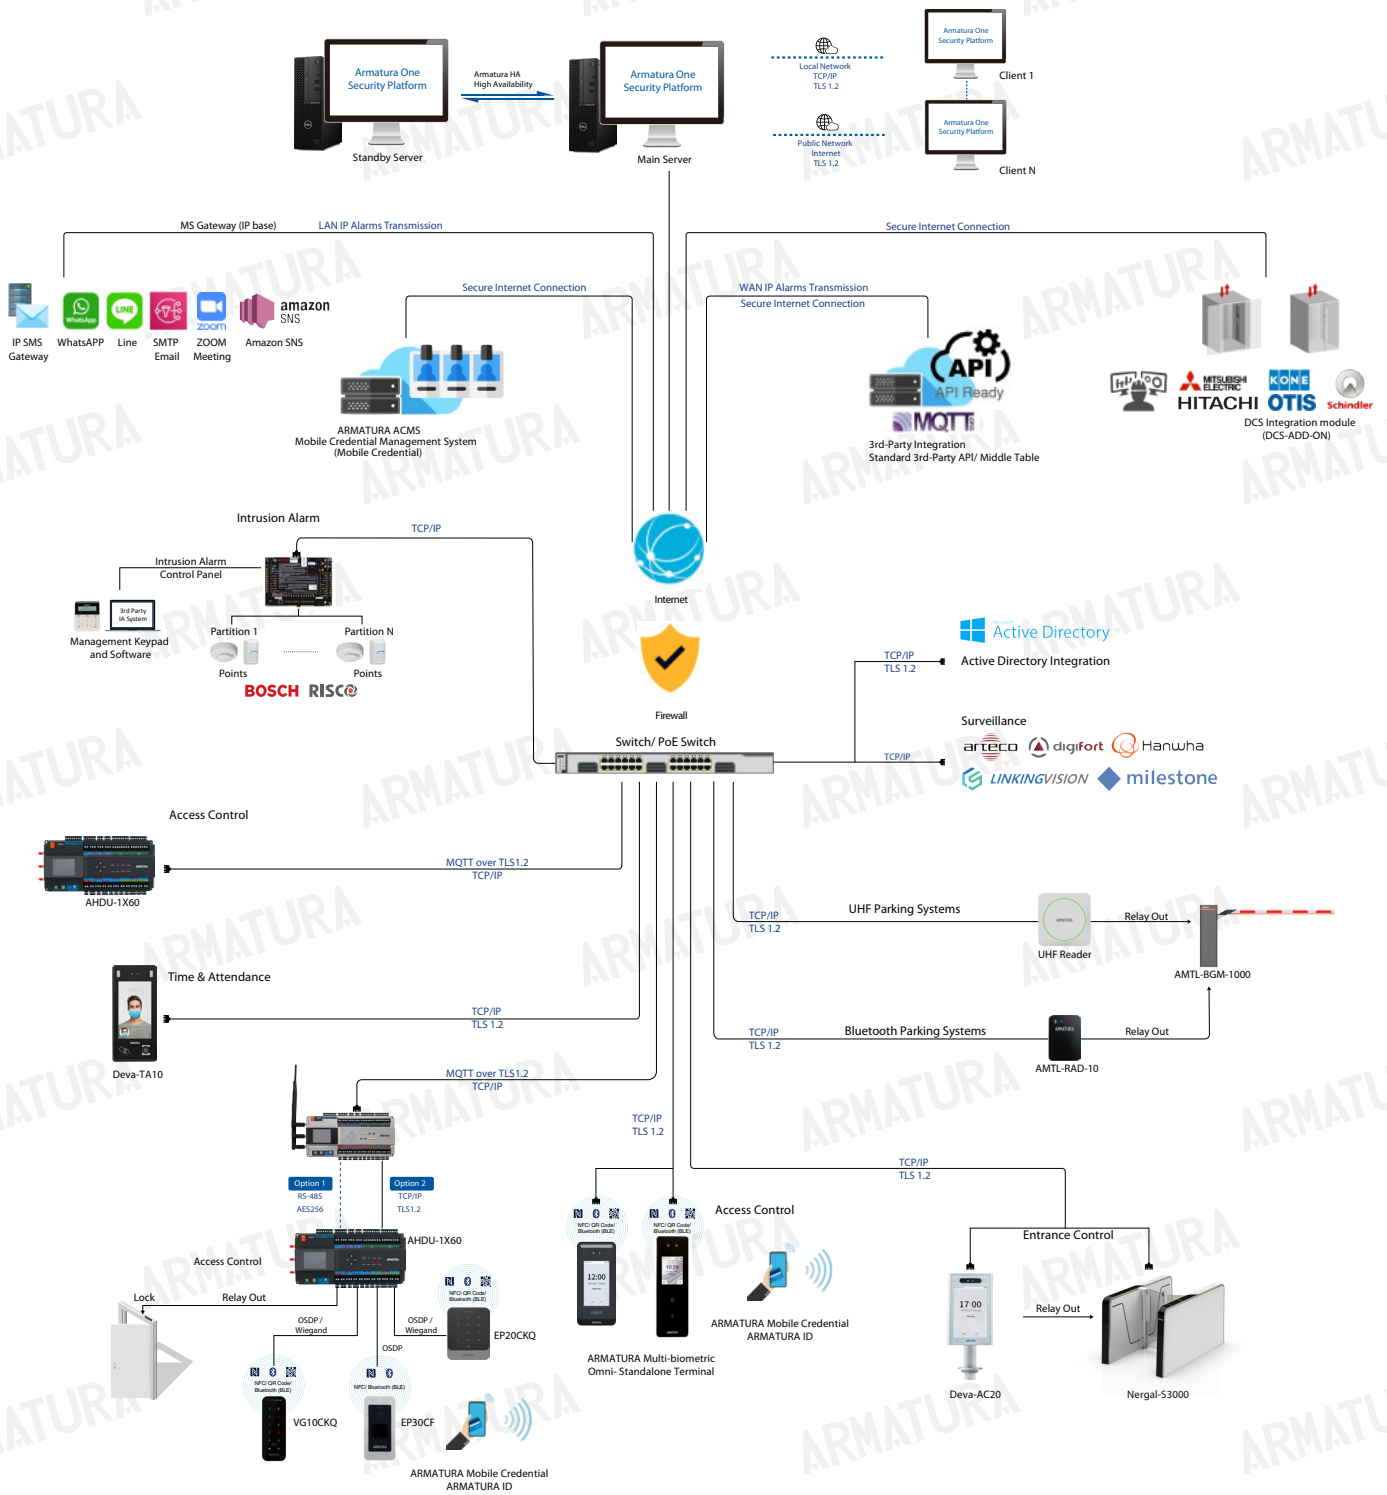



Address: 190 Bluegrass Valley Parkway Alpharetta, GA 30005

Phone: +1-650-4556863

Email: sales@armatura.us

Website: www.armatura.us

Copyright © 2024 Armatura LLC @ ARMATURA, the ARMATURA logo, are trademarks of Armatura