

### **DS-D6043FL Series**

43-inch Wall Mounted Digital Signage



#### **Features and Functions**

- Various materials support in pictures, audio files, video files, PDF files, HTML, dynamic webpages, rolling subtitles, live broadcasting, third-party data, etc.
- Flexible programs schedule and display
- Convenient remote and local materials updating
- Centralized and integrated control of terminals, e.g., scheduled startup/shutdown,
  brightness/volume adjustment, picture capture, etc.
- Multi-level organization management for materials, programs, terminals and user accounts, etc.
- Multi-level user management with different permissions authorized
- Stable and reliable hardware design
- Hardening security: material/program/schedule review, device activation with strong password, screen saver password, etc.







## **Specifications**

Model		DS-D6043FL
LCD Screen	Screen size	42.5"
	Backlight	TFT-LCD Backlight
	Max. resolution	1920 × 1080
	Brightness	400 cd/m <sup>2</sup>
	Contrast	1200:1
	Response time	8 ms
	Pixel pitch	0.16335 × 0.49005 mm
	Color	8 bit
	Viewing angle	Horizantal 178°, vertical 178°
	Active area	940.896 (H) × 529.254 (V) mm
	Display mode	Horizontal display
Interfaces	HDMI interface	1
	VGA interface	1
	Audio input	1
	Audio output	1
	Speaker	2, 8Ω, 3W
	USB interface	2
	RS-232 interface	1
	Network	1, RJ-45 10/100 Mbps self-adaptive Ethernet interface
	SD card slot	1
	SIM card slot (for 3G/4G models only)	1
General	Color of casing	Black and Silver hemming
	Power supply	100 to 240 VAC, 50/60Hz
	Power consumption	≤ 100 W
	Standby power consumption	≤1 W
	Working temperature	5 to 40 ° C (41 to 104 ° F)
	Working humidity	10 to 90 % (non-condensing)
	Weight	≤ 26.5 kg
	Mounting mode	Wall mounting



# Dimensions (unit: mm)

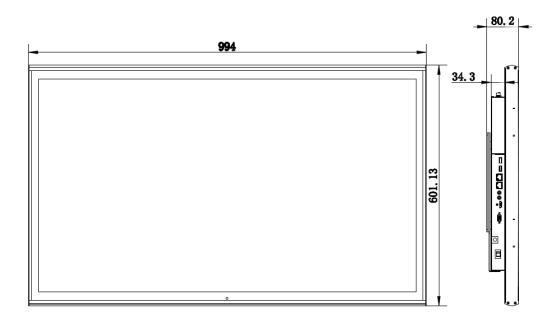

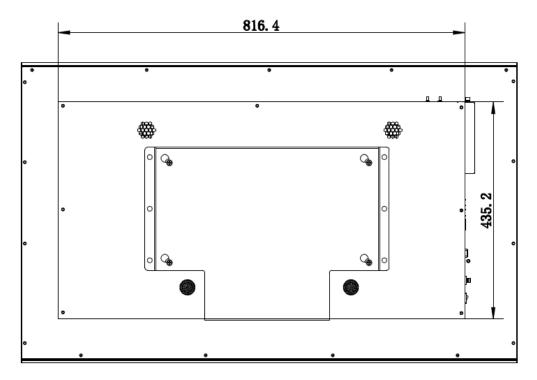



### **Physical Interfaces**



















Interface	Description
SWITCH	Turn on/off the unit
100~ 240V	100 to 240 VAC power supply
VGA IN	VGA analog input
HDMI IN	2-ch HDMI input
AUDIO IN/OUT	Audio input/output
LAN	10/100/1000 Mbps self-adaptive Ethernet interface
RS-232 IN	Serial port input
USB 3.0	USB 3.0 interface
USB 2.0	USB 2.0 interface

#### **Available Models**

DS-D6043FL

Distributed by

Headquarters

No.555 Qianmo Road, Binjiang District, Hangzhou 310051, China T +86-571-8807-5998 overseasbusiness@hikvision.com

Hikvision Poland T +48-22-460-01-50 poland@hikvision.com Hikvision USA T+1-909-895-0400 sales.usa@hikvision.com

Hikvision India T +91-22-28469900 sales@pramahikvision.com

Hikvision UK T +44-1628-9021-4 support.uk@hikvision.com Hikvision Europe T +31-23-5542770 saleseuro@hikvision.com

Hikvision Italy T +39-0438-6902 info.it@hikvision.com

Hikvision Singapore T +65-6684-4718 sg@hikvision.com Hikvision Middle East T +971-4-8816086 salesme@hikvision.com

Hikvision France T +33(0)1-85-330-444 info.fr@hikvision.com

Hikvision Oceania T +61-2-8599-4233 salesau@hikvision.com Hikvision Russia T +7-495-669-67-99 saleru@hikvision.com

Hikvision Spain T +34-91-737-16-55 info.es@hikvision.com

Hikvision Hong Kong T +852-2151-1761