

## DS-2CD6924F-I(S)(/NFC)[4mm] 8 MP PanoVu Series Panoramic Dome Camera

**DARKFIGHTER**



### Key Features

- 1/2.8" Progressive scan CMOS
- 4096 × 1800@30fps in panorama mode
- 4 × 4 mm lens
- 4 × IR LEDs, up to 20 m IR distance
- H.265, H.265+
- IP67, IK10
- 3D DNR
- BLC/ROI/HLC
- Audio and alarm I/O (-S)
- 6 behavior analyses, audio exception detection and face detection



## Specifications


<b>Camera</b>		
Image Sensor	1/2.8" Progressive Scan CMOS	
Min. Illumination	Color: 0.002 Lux @ (F1.2, AGC ON), 0.007Lux @ (F1.8, AGC ON), B/W: 0.0008Lux @(F1.2, AGC ON), 0.002Lux @(F1.8, AGC ON), 0 Lux with IR	
Shutter Speed	1/25 s to 1/100,000 s	
Slow Shutter	No	
Day & Night	IR Cut Filter	
Digital Noise Reduction	3D DNR	
WDR	Digital WDR	
2-Axis Adjustment	Pan: 0° to 355°, tilt: 0° to 90°	
<b>Lens</b>		
Focal length	4 × 4 mm lens	
Aperture	F1.8	
Focus	No	
FOV	Horizontal field of view: 180° Vertical field of view: 86.7°	
Lens Mount	M12	
<b>IR</b>		
IR Range	4 × IR LEDs, up to 20 m	
Wavelength	850nm	
<b>Compression Standard</b>		
Video Compression	Main stream: H.265/H.264 Sub stream: H.265/H.264/MJPEG	
H.264 Type	Baseline Profile/Main Profile/High Profile	
H.264+	Main stream and sub-stream support	
H.265 Type	Main Profile	
H.265+	Main stream and sub-stream support	
Video Bit Rate	32 Kbps to 16 Mbps	
Audio Compression (-S)	G.711/G.722.1/G.726/MP2L2/PCM/AAC	
Audio Bit Rate (-S)	64Kbps(G.711)/16Kbps(G.722.1)/16Kbps(G.726)/32-192Kbps(MP2L2)	
<b>Smart Feature-set</b>		
Behavior Analysis	Line crossing detection, intrusion detection, region entrance, region exiting, unattended baggage detection, object removal detection	
Exception Detection (-S)	Audio exception	
Face Detection	Yes	
Region of Interest	Support 4 fixed regions for main stream and sub-stream	
<b>Image</b>		
Max. Resolution	Panorama mode	4096 × 1800
	Original mode	2160 × 3840
Main Stream	Panorama mode	50Hz: 25fps (4096 × 1800, 4096 × 1440, 4096 × 1080) 60Hz: 30fps (4096 × 1800, 4096 × 1440, 4096 × 1080)
	Original mode	50Hz: 25fps (2160 × 3840, 1080 × 1920) 60Hz: 30fps (2160 × 3840, 1080 × 1920)

Sub Stream	Panorama mode	50HZ: 25fps (704 × 320) 60HZ: 30fps (704 × 320)
	Original mode	50HZ: 25fps (480 × 768, 320 × 512) 60HZ: 30fps (480 × 768, 320 × 512)
Image Enhancement	BLC/3D DNR/HLC	
Image Setting	Saturation, brightness, contrast, sharpness, AGC and white balance adjustable by client software or web browser	
Day/Night Switch	Auto/Schedule/Triggered by Alarm In (with -S model)	
Picture Overlay	128 × 128 24-bit BMP, area optional	
<b>Network</b>		
Network Storage	Support Micro SD/SDHC/SDXC card (128G), local storage and NAS (NFS,SMB/CIFS), ANR	
Alarm Trigger	Motion detection, video tampering, network disconnected, IP address conflict, illegal login, HDD full, HDD error, Alarm input, Alarm output	
Protocols	TCP/IP, ICMP, HTTP, HTTPS, FTP, DHCP, DNS, DDNS, RTP, RTSP, RTCP, PPPoE, NTP, UPnP, SMTP, SNMP, IGMP, 802.1X, QoS, IPv6, UDP, Bonjour	
General Function	One-key reset, anti-flicker, heartbeat, mirror, password protection, privacy mask, watermark, IP address filter	
API	ONVIF (PROFILE S, PROFILE G), ISAPI	
Simultaneous Live View	Up to 20 channels	
User/Host	Up to 32 users 3 levels: Administrator, Operator and User	
Client	iVMS-4200, iVMS-5200	
Web Browser	IE8+, Chrome 31.0-44, Firefox 30.0-51, Safari 8.0+	
<b>Interface</b>		
Audio I/O (-S)	1 Input (line in/mic in, 3.5 mm), 1 output(3.5 mm)	
Communication Interface	1 RJ45 10M/100M self-adaptive Ethernet port, RS485 /NFC: 1 1000M FC fiber optical interface	
Alarm (-S)	2 Inputs, 2 outputs (max. 24 VDC, 1 A/110 VAC, 500 mA)	
On-board Storage	Micro SD/SDHC/SDXC slot, up to 128 GB	
Reset Button	Yes	
<b>Audio (-S)</b>		
Environment Noise Filtering	Yes	
Audio Sampling Rate	Max. 48 kHz	
<b>Fiber Optical</b>		
Interface Type	FC interface	
Optical Type	Single mode, single fiber	
Input/output Wavelength	Tx1310nm/1.25G, Rx1550nm/1.25G	
Transmission Distance	20 km	
<b>General</b>		
Operating Conditions	-40 °C to +60 °C (-40 °F to +140 °F), Humidity 95% or less (non-condensing)	
Power Supply	12 VDC ± 20%, PoE: 802.3at, class 4	
Power Consumption and Current	12 VDC, 1.5A, max. 18W PoE (802.3at, 42.5V to 57V), 0.6A to 0.4A, max. 25W	
Protection Level	IP67, IK10 TVS 2000V Lightning Protection, Surge Protection and Voltage Transient Protection	
Dimensions	190 × 207 × 208 mm (7.5" × 8.2" × 8.2")	
Weight	3500 g (7.7 lb.)	

**Available Models**

- DS-2CD6924F-I [4mm]
- DS-2CD6924F-IS [4mm]
- DS-2CD6924F-IS/NFC [4mm]

**Dimensions**

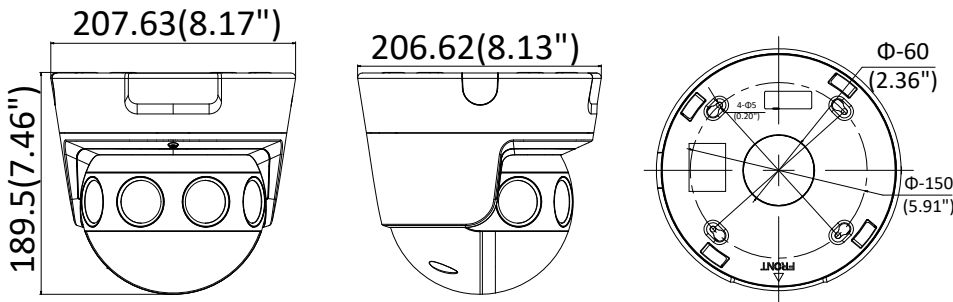

Unit: mm

**Accessories**



**DS-1602ZJ**  
Wall Mount



**DS-1661ZJ**  
Pendant Mount



**DS-1662ZJ**  
Pendant Mount



Cap (Included)

Distributed by



**HIKVISION**

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Europe**  
T +31-23-55-42-770  
info.eu@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision France**  
T +33(0)1-85-330-450  
info.fr@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision UK**  
T +01628-902140  
support.uk@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Korea**  
T +82-31-731-8841  
sales.korea@hikvision.com

**Hikvision Brazil**  
T +55 11 3318-0050  
Latam.support@hikvision.com

**Hikvision Africa**  
T +27 (10) 0351172  
sale.africa@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761