

DS-K1T671MF **Face Recognition Terminal**



- Forced mask wearing alert: If the recognizing face does not wear a mask, the device will prompt a voice reminder. At the same time, the authentication or attendance will be failed
- 7-inch LCD touch screen, 2 Mega pixel wide-angle lens, built-in M1 card reading module
- Face recognition distance (without face mask): 0.3 m to 3 m, Duration < 0.2 s/User, Accuracy rate ≥ 99%
- Max.6000 faces, Max.6000 cards and Max. 5000 fingerprints
- Two-way audio with client software, indoor station, and main station
- Supports TCP/IP
- Configuration via the web client
- Supports ISAPI and ISUP5.0 protocol
- IP65


▪ Specification

Display	
Screen size	7 inch
Operation method	Capacitive touch screen
Type	LCD
Video	
Lens	2
Resolution	2 MP
FOV	HFOV = 46°; VFOV = 87°
Audio	
Audio quality	Noise suppression and echo cancellation
Network	
Wired network	Support
Interface	
Network interface	1 RJ-45, 10/100/1000 M self-adaptive
Lock control	1
Exit button	1
Door contact input	1
Alarm input	2
Alarm output	1
TAMPER	1
RS-485	1 RS-485 (Half duplex, HIKVISION)
Wiegand	1 Wiegand (Hik 26bit, Hik 34bit)
USB	2
Authentication	
Card type	M1 card
Card reading frequency	13.56 MHz
General	
Power supply	12 VDC, 2 A
Working temperature	-30 °C to 60 °C (-22 °F to 140 °F)
Working humidity	0 to 90% (No condensing)
Dimensions	290 mm × 116.5 mm × 33 mm (11.4" × 4.6" × 1.3")
Installation	Surface mounting
Language	English, Spanish (South America), Arabic, Thai, Indonesian, Russian, Vietnamese, Portuguese (Brazil)
Platform	Hik-ProConnect and HikCentral Professional
Function	
QR code recognition	Support
Face anti-spoofing	Support


▪ Available Model

DS-K1T671MF

▪ Dimension

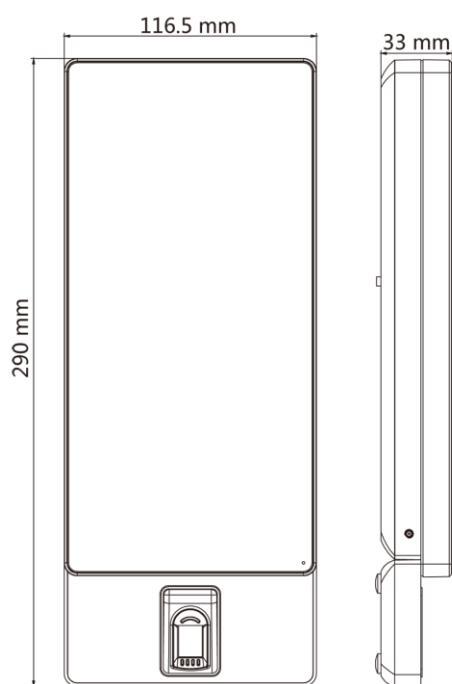

With Fingerprint Module

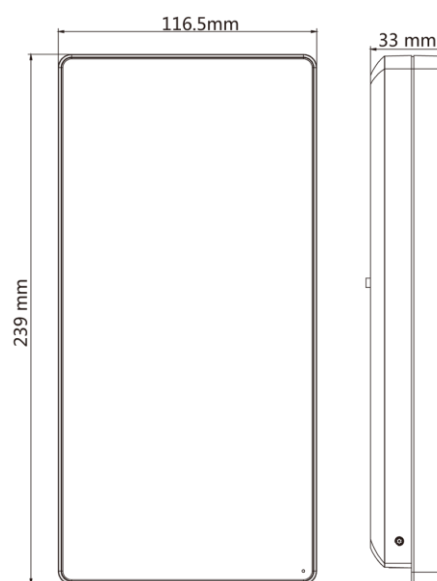

Without Fingerprint Module

▪ Accessory

▪ Optional

DS-KAB671-S Protective Shield	DS-KAB671-P1 Stand Stick	DS-KAB6-D1 Base Bracket	DS-KAB671-P2 Stand Stick	DS-KAB673-S1 Protective Shield
				
DS-KAB6-W1 Bracket				
				

Headquarters

No.555 Qianmo Road, Binjiang District,
Hangzhou 310051, China
T +86-571-8807-5998
www.hikvision.com



Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision_Global



Hikvision
Corporate Channel



hikvisionhq