


## AE-VC061P(N)-ITS 720TVL EXIR Mobile Twin Camera



### Key Features

- 0.1Lux @(F1.2,AGC ON), 0 Lux with EXIR (IR function is only supported by back sight camera)
- 720TVL high definition
- Support electronic Day/Night switch
- Adopt bi-lens with wider monitoring coverage
- Support electronic shutter and AGC
- Built-in microphone
- Patented universal regulating mechanism, easy to adjust
- Anti-vibration design and aviation port for mobile environments
- Suitable for mobile environments

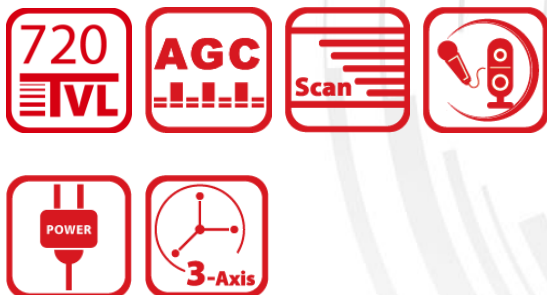


## Specifications

| <b>Camera</b>                |                                                                                                                                                                                                               |
|------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| Image Sensor                 | 1.0 Mega Progressive Scan CMOS                                                                                                                                                                                |
| Signal System                | NTSC                                                                                                                                                                                                          |
| Resolution                   | 1296(H)×732(V)                                                                                                                                                                                                |
| Horizontal Resolution        | 720TVL                                                                                                                                                                                                        |
| Min. Illumination            | 0.1Lux @ (F1.2,AGC ON), 0 Lux with IR                                                                                                                                                                         |
| Shutter Time                 | 1/25(30)s to 1/50,000s                                                                                                                                                                                        |
| Lens                         | 2.1mm                                                                                                                                                                                                         |
| Lens Mount                   | M12                                                                                                                                                                                                           |
| Day & Night                  | Fore Sight: Color<br>Back Sight: Electronic                                                                                                                                                                   |
| Angle Adjustment             | Fore Sight: Pan: 0°; Tilt:0°; Rotation: 0° to 360°, Bracket Angle Adjustment Range: 0° to 90°<br>Back Sight: Pan: 0° to 360°; Tilt:0° to 60°; Rotation: 0° to 360°, Bracket Angle Adjustment Range: 0° to 90° |
| Frame Rate                   | 30fps                                                                                                                                                                                                         |
| Synchronization              | Internal Synchronization                                                                                                                                                                                      |
| Video Output                 | Aviation Port                                                                                                                                                                                                 |
| S/N Ratio                    | >62dB                                                                                                                                                                                                         |
| <b>Interfaces</b>            |                                                                                                                                                                                                               |
| Video Out                    | 2-ch, Aviation Port (1Vpp Composite Output)                                                                                                                                                                   |
| Audio In                     | Built-in Microphone                                                                                                                                                                                           |
| Audio Out                    | 2-ch, Aviation Port (Output Impedance: 1KΩ±10%)                                                                                                                                                               |
| Aviation Plug                | 1: Video, 2: Audio, 3: Power, 4: GND                                                                                                                                                                          |
| <b>General</b>               |                                                                                                                                                                                                               |
| Working Temperature/Humidity | -30°C to 65°C (-22°F to 149°F), Humidity 90% or less (non-condensing)                                                                                                                                         |
| Power Supply                 | 6VDC to 16VDC                                                                                                                                                                                                 |
| Power Consumption            | MAX. 4W                                                                                                                                                                                                       |
| Protection Level             | IP4X                                                                                                                                                                                                          |
| IR Range                     | 3m                                                                                                                                                                                                            |
| Dimension                    | 59.9mm×85.6mm×80mm (2.36"×3.37"×3.15")                                                                                                                                                                        |
| Weight                       | Approx. 400g (0.88lb)                                                                                                                                                                                         |

## Order Models

AE-VC061P-ITS (2.1mm); AE-VC061P-ITS (2.8mm);  
AE-VC061N-ITS (2.1mm); AE-VC061N-ITS (2.8mm);

## Dimensions

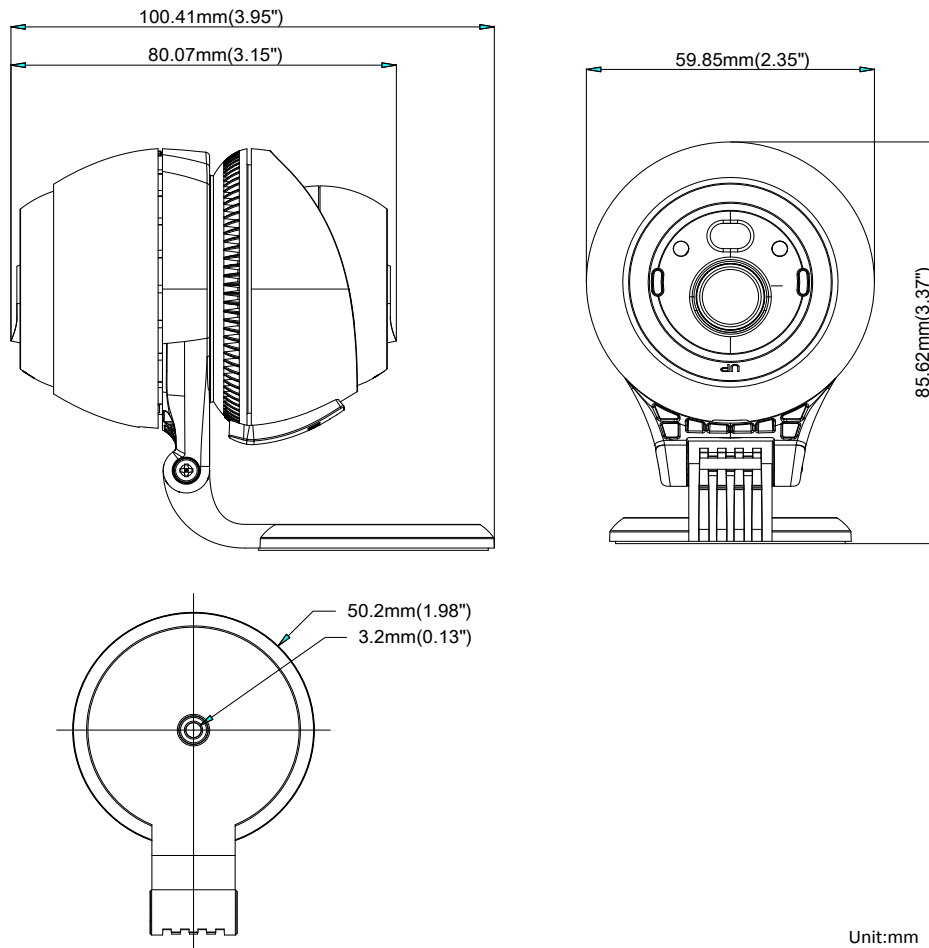

Distributed by

### Headquarters

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
overseasbusiness@hikvision.com

**Hikvision USA**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision Italy**  
T +39-0438-6902  
info.it@hikvision.com

**Hikvision Singapore**  
T +65-6684-4718  
sg@hikvision.com

**Hikvision Europe**  
T +31-23-5542770  
saleseuro@hikvision.com

**Hikvision France**  
T +33(0)11-85-330-444  
info.fr@hikvision.com

**Hikvision Oceania**  
T +61-2-8599-4233  
salesau@hikvision.com

**Hikvision Middle East**  
T +971-4-8816086  
salesme@hikvision.com

**Hikvision Spain**  
T +34-91-737-16-55  
info.es@hikvision.com

**Hikvision Hong Kong**  
T +852-2151-1761

**Hikvision Russia**  
T +7-495-669-67-99  
saleru@hikvision.com

**Hikvision Poland**  
T +48-22-460-01-50  
poland@hikvision.com

**Hikvision Canada**  
T +1-909-895-0400  
sales.usa@hikvision.com

**Hikvision India**  
T +91-22-28469900  
sales@pramahikvision.com

**Hikvision UK**  
T +44-1628-9021-4  
support.uk@hikvision.com