

## DS-A81024S

### 24-slot Single Controller Storage



## Introduction

The DS-A81 series is an economical and reliable Hybrid SAN (Storage Area Network) product. Hikvision Hybrid SAN product creates a network with access to data storage servers, and it integrates Hikvision's unique video direct streaming technology as well as supports IPSAN. Hybrid SAN system supports third-party cameras such as BOSCH, AXIS, SONY, Samsung, etc., and supports RTSP and ONVIF protocols, and extended data retention. With no recording server needed, Hikvision's Hybrid SAN systems truly make applications simple, flexible, and budget-friendly.

## Key Feature

### Economical and Stable Hardware Platform

- 64-bit multi-core processor.
- 4 to 64 GB high-speed cache.
- PCI-E3.0 high-speed transmission channel, support 4 × GbE or 2 × 10GbE is extendable
- Five 10M/100M/1000M network interfaces.
- Redundant design for key modules.
- 4U chassis model supports 24 HDDs.

### HDD Detection and Repair/RAID Optimization

- Detection before operation.
- Detection in operation.
- Fault repair.
- RAID 0, 1, 3, 5, 6, 10, 50.
- Global and local hot spare.
- Quick RAID building.
- Capability of cascading up

### Advanced Data Protection

- Synchronous backup of key information in system disk and HDD.
- RAID-based tamper-proof data technology.
- Auto data synchronization between devices.

### Energy Efficient

- CPU load balance.
- Auto fan tuning.

### User-Friendly UI

- One touch configuration.
- Various alarm management.
- Supports SADP protocol.
- Supports SNMP.

### Video Security-Specialized Stream Media Direct Storage (Direct Streaming Mode)


- Space pre-allocation strategy.
- Direct storage for video and picture streams.
- Supports direct IP camera/DVR/NVR streaming and recording.
- Support H264, H264+, H265, H265+.
- Support N+1.
- Supports camera access through iSCSI, RTSP, ONVIF, and PSIA protocol.
- Supports alarm/scheduled/manual recording.
- Automatic network replenishment (ANR), timely uploading, and video loss alarm.
- Lock key videos.
- Supports both Direct Streaming Mode and IPSAN Mode.
- Search, play, and download videos by video type or video time.

## ▪ Specification


<b>Network</b>	
Protocol	iSCSI, RTSP, ONVIF, PSIA
<b>External interface</b>	
USB	2*USB3.0, 1*USB2.0
VGA	Supported
Data network interface	4, 1000M Ethernet interface(4 × GbE or 2 × 10GbE is extendable)
MiniSAS interface	1
COM	1
Management network interface	1, 1000M Ethernet interface
<b>Storage</b>	
HDD slot	24
Interface/capacity	SATA/1 TB, 2 TB, 3 TB, 4 TB, 6 TB, 8 TB, 10 TB, 12 TB, 14 TB, 16 TB
Hot-swapping	Supported
HDD support	RAID(Enterprise Hard Disk)
RAID	RAID 0, 1, 3, 5, 6, 10, 50,JBOD, Hot-Spare
<b>Performance</b>	
Direct Streaming Mode: video (2 Mbps) + picture	512-ch
<b>Hardware</b>	
Structure	Controller Structure
Processor	64-bit multi-core processor
Cache	4 GB (extendable to 64GB)
<b>Storage Management</b>	
Disk management	Disk inspection, alarm and repair
Logical volume management	iSCSI volume, video volume management
<b>Recording Management</b>	
Recording mode	Timing recording, manual recording, alarm recording
Video protection	Lock key video, N+1 service protection, ANR, video loss detection and alarm
Searching mode	Search by time and event
Downloading mode	Quick download, batch download, download by segment, download by merging
<b>Device Maintenance</b>	
Management mode	Web-based GUI, serial port CLI, centralized management of multiple devices
Alarm mode	Sound, light, email, message, web page
Log downloading	Download on web page
<b>HDD</b>	
HDD Model	Hikvision,HK7216AH,16T; Hikvision,HK7210AH,10T; Hikvision,HK728TAH,8T; Hikvision,HK726TAH,6T; Hikvision,HK724TAH,4T;
<b>General</b>	
Power supply	Redundant 550W
Consumption(with HDDs)	Working: ≤ 480

Environment temperature	Working: +5 °C to +40 °C (41 °F to 104 °F); Storing: -20 °C to +70 °C (-4 °F to +158 °F)
Humidity	Working: 20% to 80%RH (non-condensing/frozen); Storing: 5% to 90%RH (non-condensing/frozen)
Chassis	4U (19-inch height)
Dimensions(W × D × H)	484 x 684 x 174 mm (19.1 x 26.9 x 6.9 in)
Weight (without HDDs)	29kg

▪ **Typical Application**

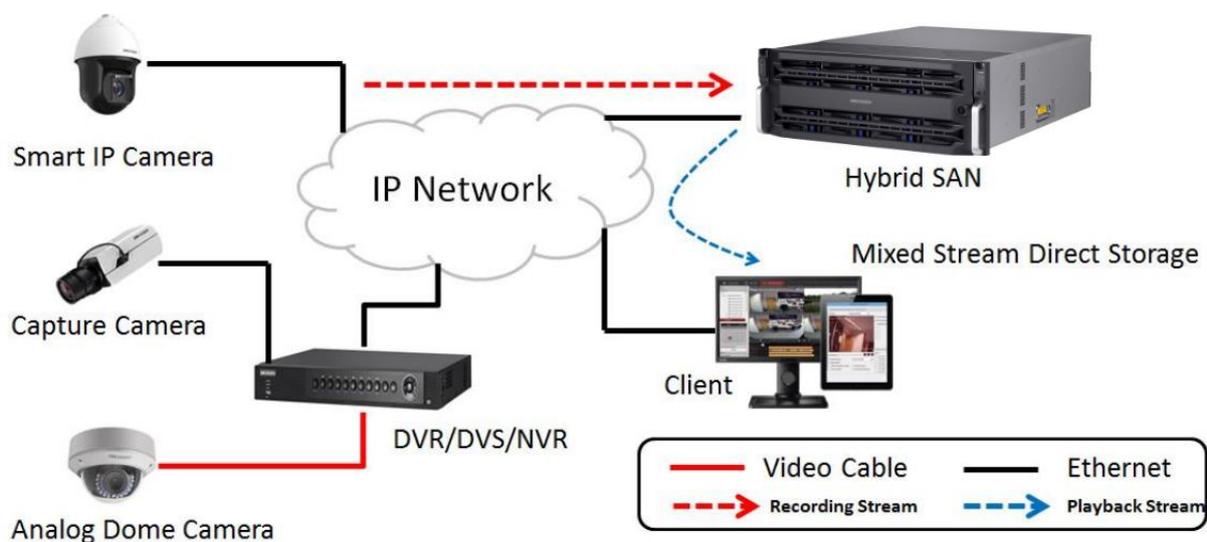

## Physical Interface

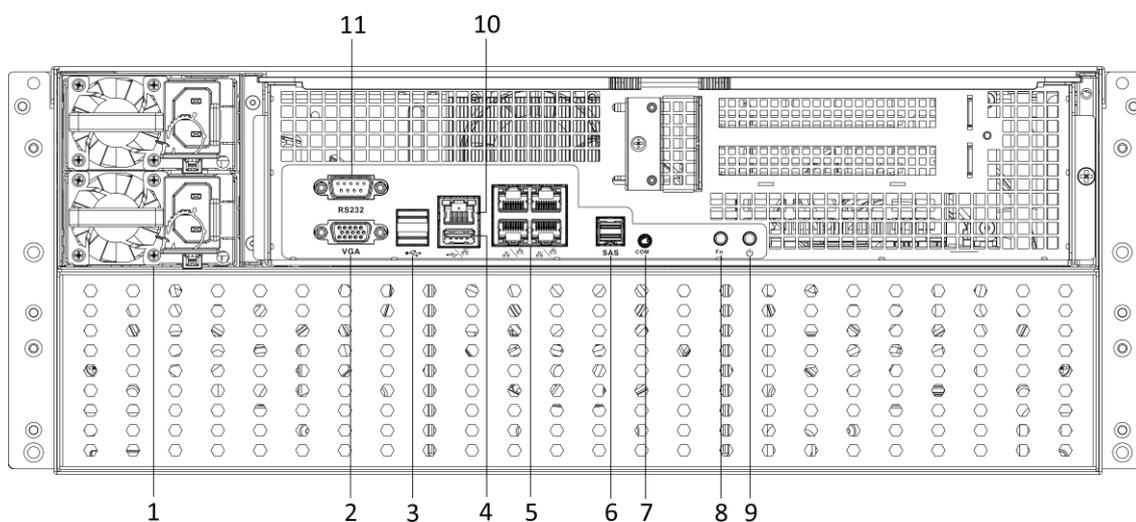


No.	Description	No.	Description
1	Power module	7	COM
2	VGA interface	8	FN button
3	USB interface	9	Power switch
4	USB interface	10	Management LAN interface
5	LAN interface 1 to 4	11	RS-232 interface
6	SAS interface		

## Available Model

DS-A81024S

▪ Dimension

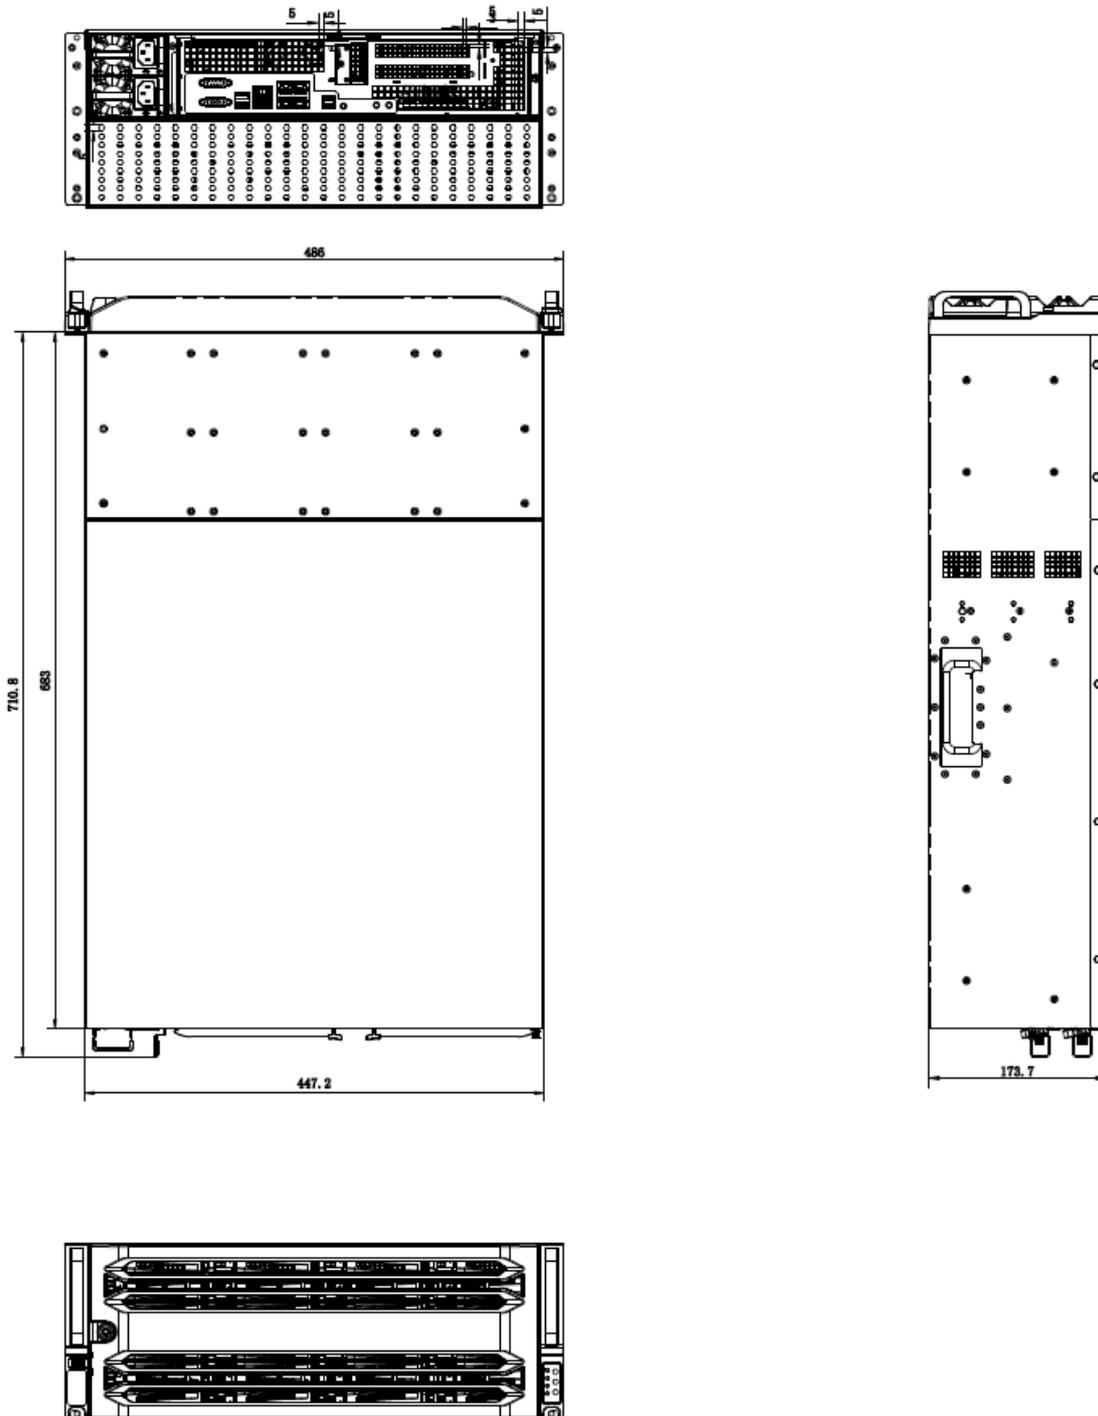

**Headquarters**

No.555 Qianmo Road, Binjiang District,  
Hangzhou 310051, China  
T +86-571-8807-5998  
www.hikvision.com

Follow us on social media to get the latest product and solution information.



Hikvision



HikvisionHQ



HikvisionHQ



Hikvision\_Global



Hikvision  
Corporate Channel



hikvisionhq

